





# C 30(96) - 60 Hz

Laufрад:  
Impeller: Ø 96 mm  
Girante:

Feststoffe bis:  
Solids up to: 11 mm Ø  
Solidi fino a:

Umdrehung:  
Speed: ~ 3420 min<sup>-1</sup>  
Velocità:

T1611151 96 -> 96mm; 2850 -> 3420rpm

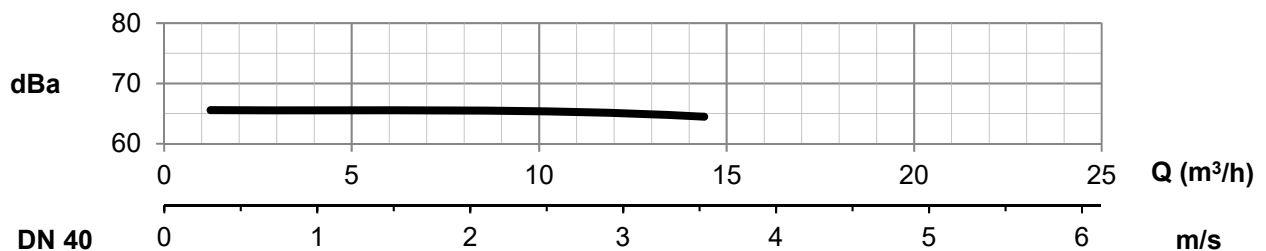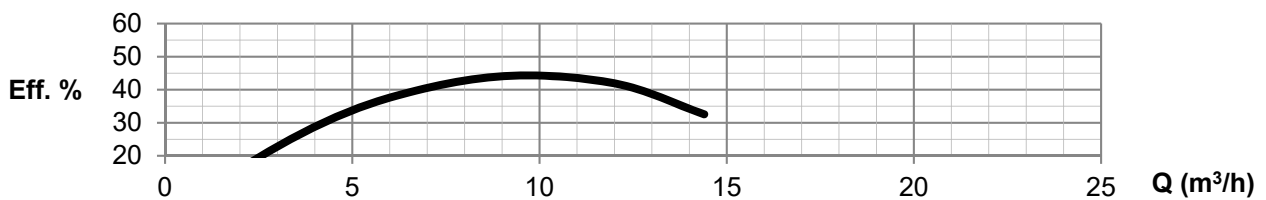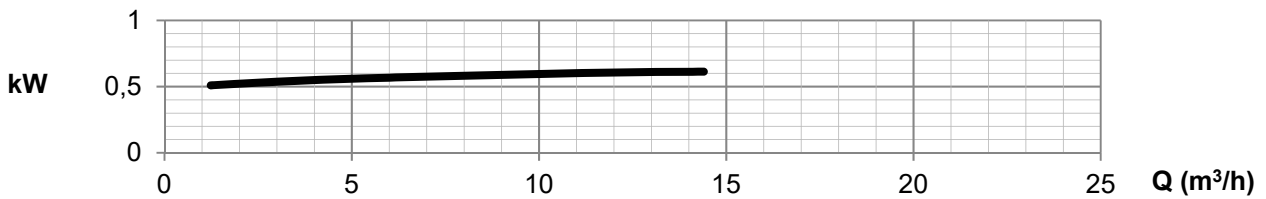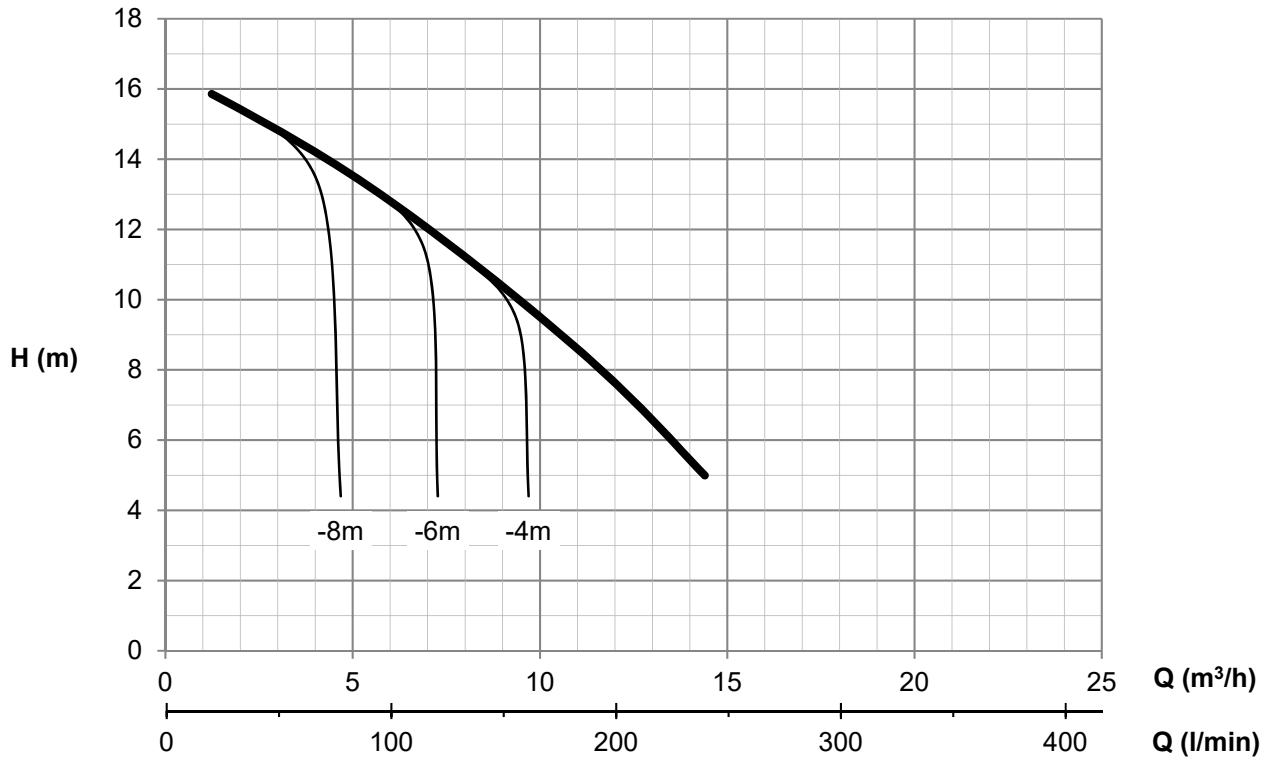

ISO 9906:2012 - GRADE 3B, ρ = 1 kg/dm³, ν = 1 mm²/s, calculated